

*Regional Cooperation for
Limited Area Modeling in Central Europe*



Flow dependent SPP

Endi Keresturi, Clemens Wastl



Czech
Hydrometeorological
Institute




ARSO METEO
Slovenia

- Stochastic perturbation pattern in SPP is random
 - Weather or flow situation is not considered
- Can a stochastic perturbation pattern in SPP be adjusted to reflect the state of the flow?
 - Focus perturbations to the areas of high uncertainty
 - Make sure that perturbations are added to sensitive areas in the domain
 - Flow dependent SPP (FD-SPP)


- C-LAEF
 - cy43t2
 - Grid size: 2.5 km
 - 90 vertical levels
 - 3-h cycling
 - 16 perturbed + 1 control
 - Coupling: ECMWF-EPS (1-h)
 - EnsJk, SPP, LBC and surface perturbations

- Implemented for CLAEF1k
 - cy46t1
 - cy46h1 by Ulf Andrae

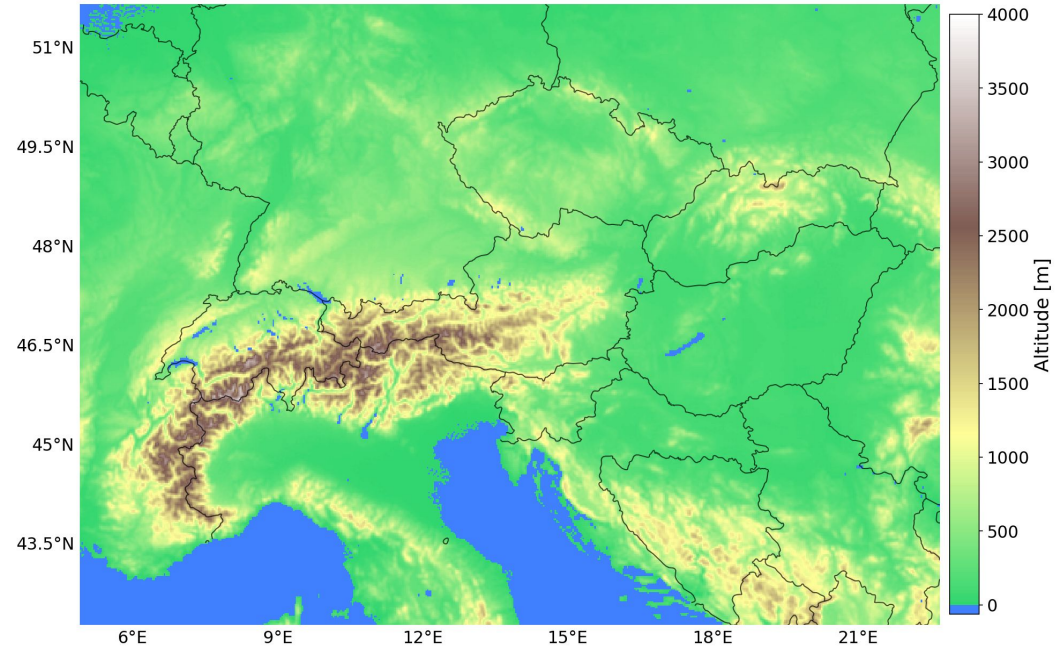

□ C-LAEF1k

- cy46t1
- Grid size: 1 km
- 90 vertical levels
- 3-h cycling
- 16 perturbed + 1 control (~~3D-EnVar~~)
- Coupling: ECMWF-EPS (1-h)
- EnsJk, SPP, LBC and surface perturbations
- Larger domain

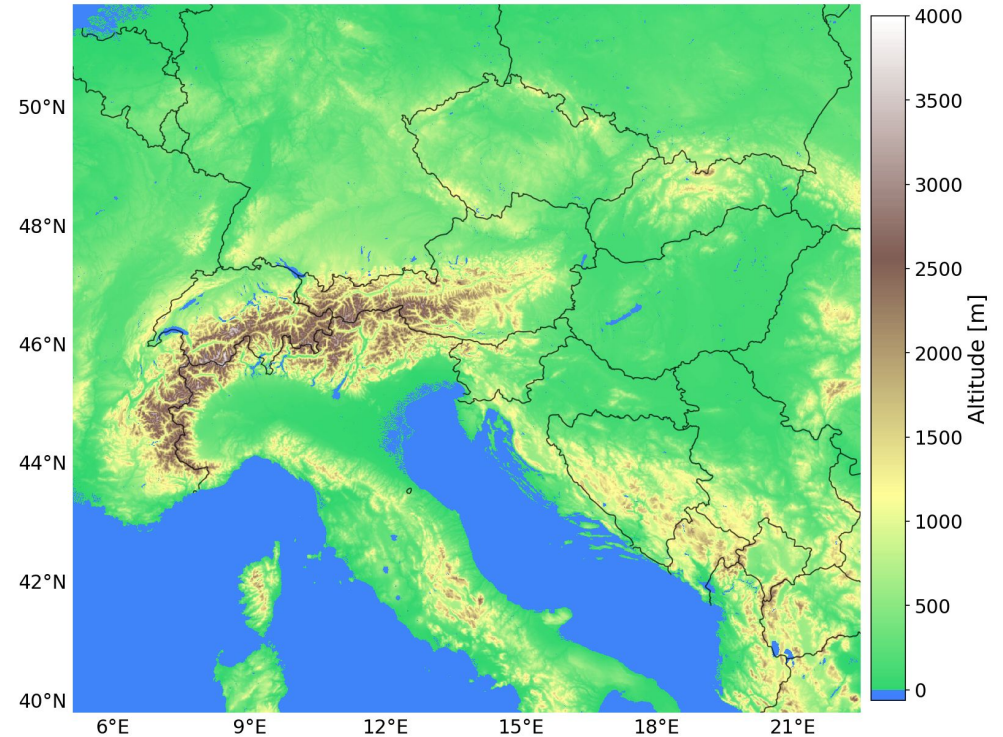

- Parameters considered
 - C-LAEF operational implementation
- 6 physics schemes
- 12 parameters

Scheme	Parameter	Description
Microphysics	ZRDEPSRED	Snow reduction factor
	ZRDEPGRED	Graupel reduction factor
	RCRIAUTI	Snow autoconversion threshold
	RCRIAUTIC	Rain autoconversion threshold
	VSIGQSAT	Saturation limit sensitivity
Radiation	RSWINHF	Short-wave cloud thickness inhomogeneity factor
	RLWINHF	Long-wave cloud thickness inhomogeneity factor
Turbulence	XCTP	Constant for temperature and vapour pressure correlations
	XCEP	Constant for wind and pressure correlations
	XCED	Constant for dissipation of TKE
Shallow convection	XCMF	Closure coefficient at bottom level for convective mass flux
Surface	XFRACZ0	Coefficient of orographic drag

- ▶ Following Ollinaho *et al.* (2017), in C-LAEF, SPP-perturbed parameters \hat{P} are obtained:

$$\hat{P} = P e^{c+w\varphi} \quad (1)$$

- ▶ Where P is the original constant parameter, φ is normally distributed stochastic pattern and c and w are distribution parameters
 - ▶ Log-normal distribution for \hat{P}
 - ▶ φ varies in space and time independently for each variable and ensemble member
 - ▶ c , w and clipping values are adjustable
 - ▶ Tune the impact of the pattern φ

- Existing pattern will be modified by some weights
- Diagnose areas in the model which are the most uncertain for each parameter
 - Modify the pattern to perturb more there (i.e., amplify perturbations)
- The weights are then added to the perturbation field as w in (1)
 - Where $w > 1$ ($w < 1$), the perturbations will be amplified (attenuated)
 - $w \in [1, W_{max}] \rightarrow$ goal is to amplify the perturbations in targeted regions

- How to find sensitive areas in the domain?
- Pragmatic approach
 - For each of the 12 parameters, a particular model variable will be used to diagnose sensible areas for that parameter
 - Microphysics and radiation – Cloud fraction
 - Turbulence and shallow convection – TKE
 - Orographic drag – 10 m wind speed

▣ Cloud fraction is between 0 and 1 and is available for each model level

▶ Average over all model levels to obtain CF_{mean}

▶ Final weights:

$$w_{CF} = \text{MIN}[CF_{mean} \times N + 1, W_{max}]$$

▶ N = multiplication factor to increase the impact

▶ Determines how strongly chosen model variable influences the weights


- ▣ TKE is given for all levels and has unbounded values greater than 0
 - ▶ Maximum value of TKE over the whole domain needs to be calculated

- ▶ Final weights:


$$w_{TKE} = \text{MIN} \left[\frac{\text{MAX}(TKE_{levs})}{TKE_{max}} \times N + 1, W_{max} \right]$$

- ▶ N = multiplication factor to increase the impact
- ▶ For wind field, the same procedure is implemented

Example of weights

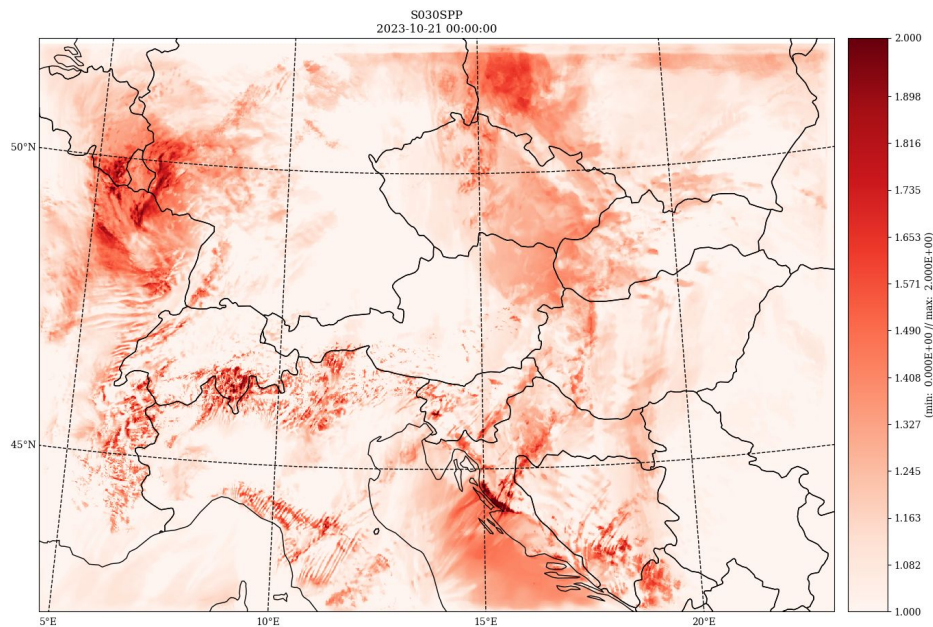


Cloud fraction

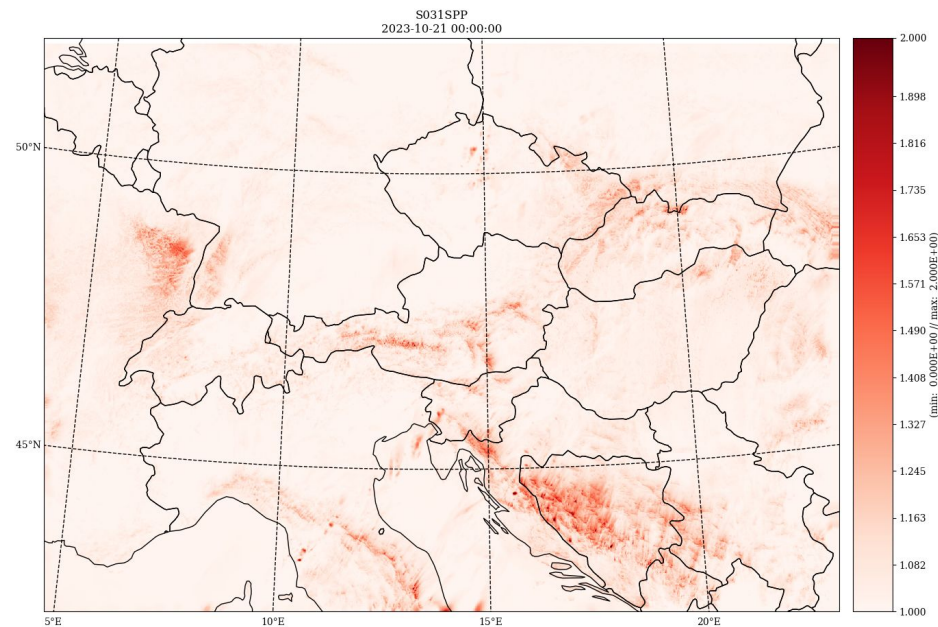

TKE


Impact on stochastic pattern

It behaves as it should!

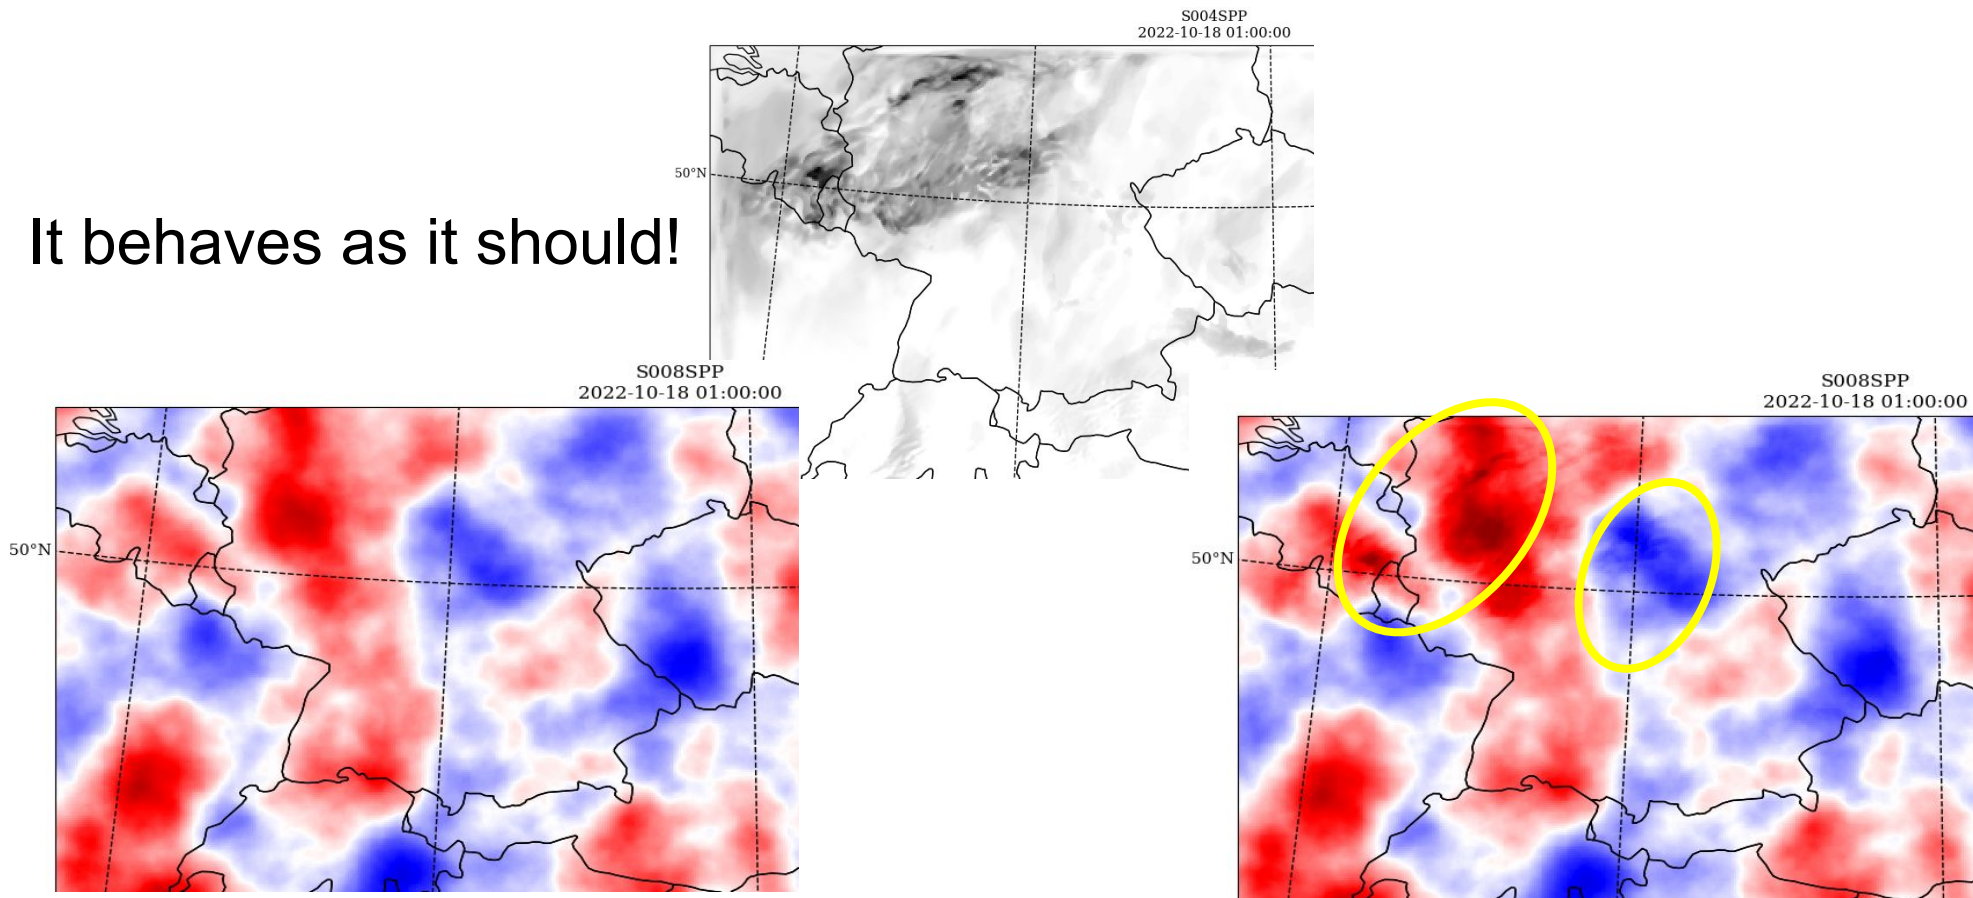

Illustrative impact of flow dependency

- Spread difference
- **FD-SPP – SPP**
- Difference „moves” with the incoming front
- Last three slides show that FD-SPP behaves expectedly

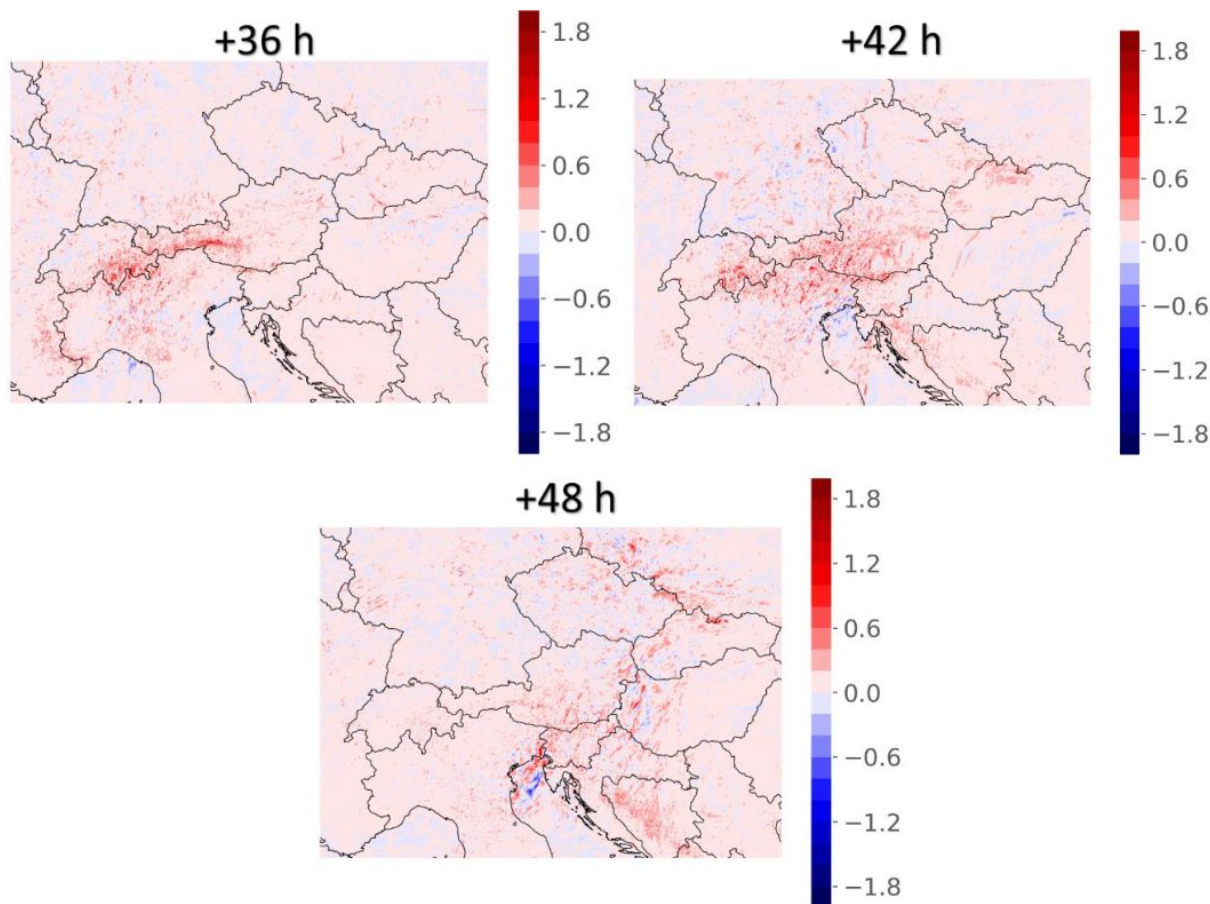

□ Experiments

□ **SPP** – standard SPP configuration used

□ **FDSPP** – flow dependent perturbations with $W_{max} = 3$ and $N = 1.5$

□ Verification

□ February 2024

□ 225 Austrian stations for surface verification (hourly)


□ 25 radiosonde stations for upper-air verification (12-hourly)

□ Paired t-test at a 95% confidence level (black dots)


Surface verification – RMSE/spread

- Plotted relative to SPP
- Spread is increased and RMSE decreased
- Good because C-LAEF is under-dispersive
- Increased accuracy and reliability


RMSE/spread [°C]. 2-m temperature

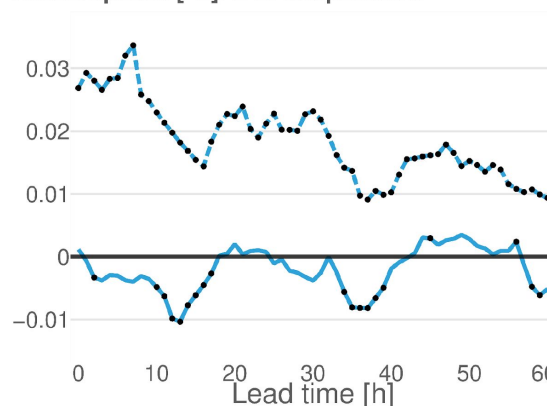

RMSE/spread [%]. 2-m relative humidity

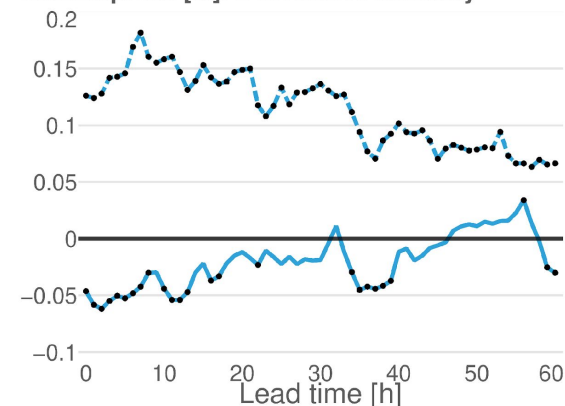


RMSE/spread [m/s]. 10-m wind speed

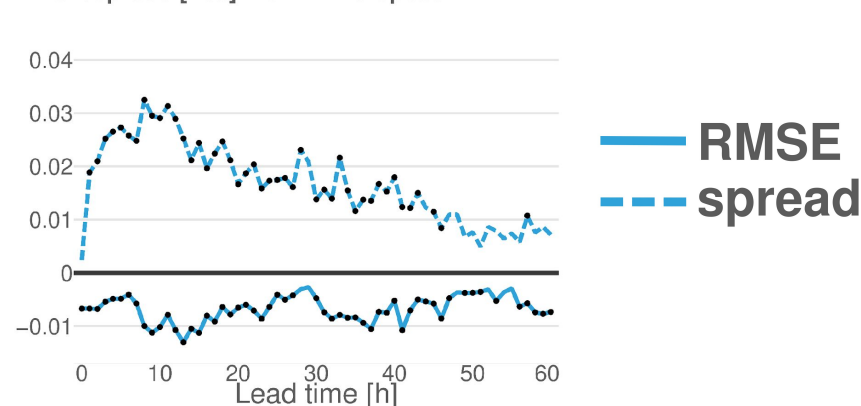


Upper-air verification – RMSE/spread

- 925 hPa
- Spread is increased and RMSE decreased
- Good because C-LAEF is under-dispersive
- Increased accuracy and reliability


RMSE/spread [°C]. 925-hPa temperature

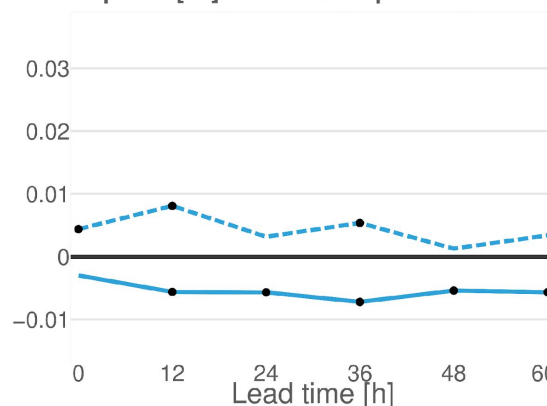

RMSE/spread [%]. 925-hPa relative humidity

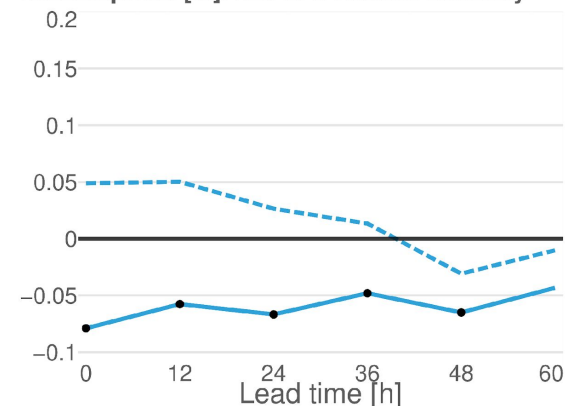


RMSE/spread [m/s]. 925-hPa wind speed

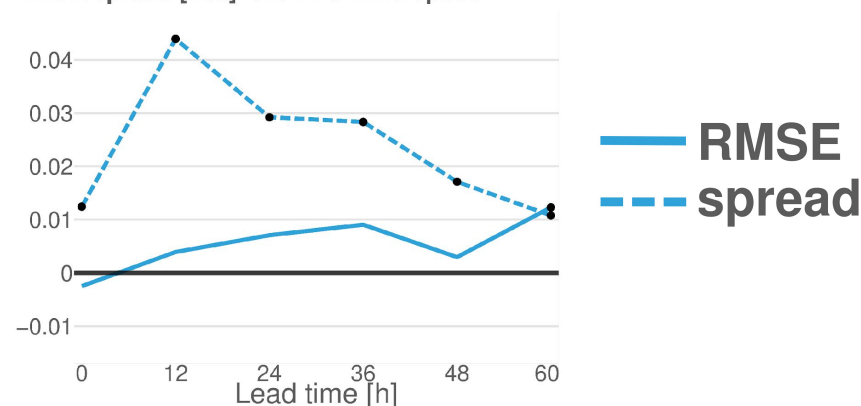


Upper-air verification – RMSE/spread

- 850 hPa
- More neutral results but still slightly positive
- Expected as model physics plays more dominant role closer to the surface


RMSE/spread [°C]. 850-hPa temperature

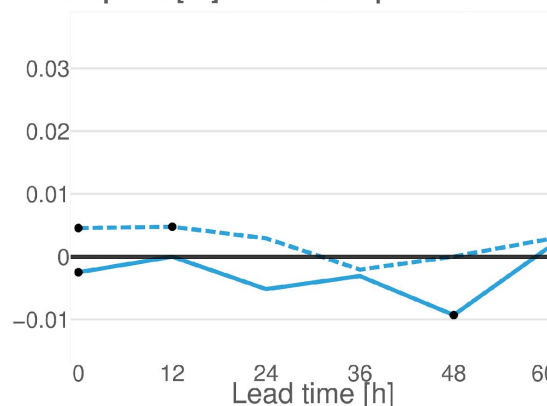

RMSE/spread [%]. 850-hPa relative humidity

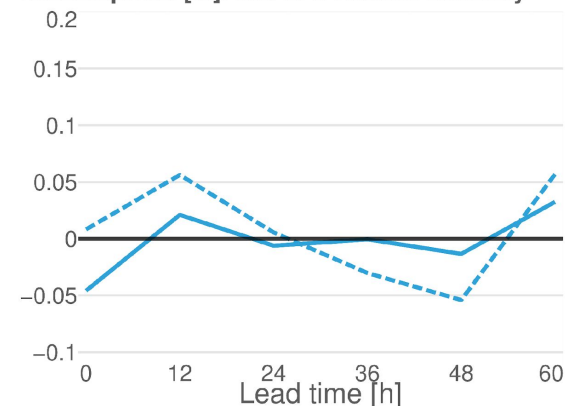


RMSE/spread [m/s]. 850-hPa wind speed

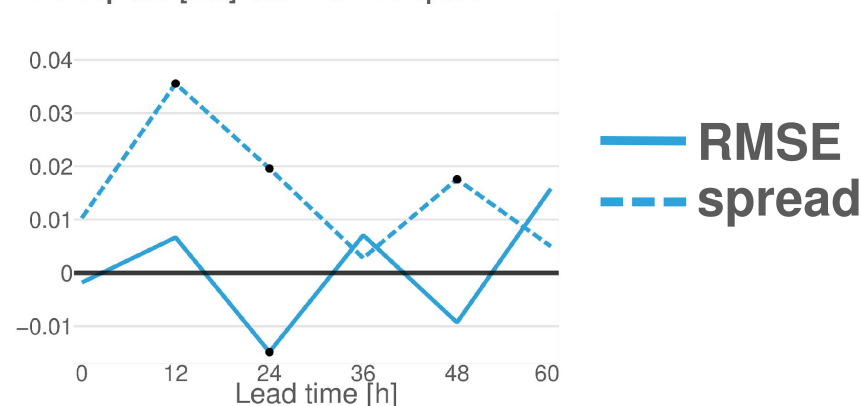


Surface verification – CRPS

- Significantly positive impact for T and RH, and more neutral for WS
- **FDSPP** is more skilful


CRPS [°C]. 2-m temperature

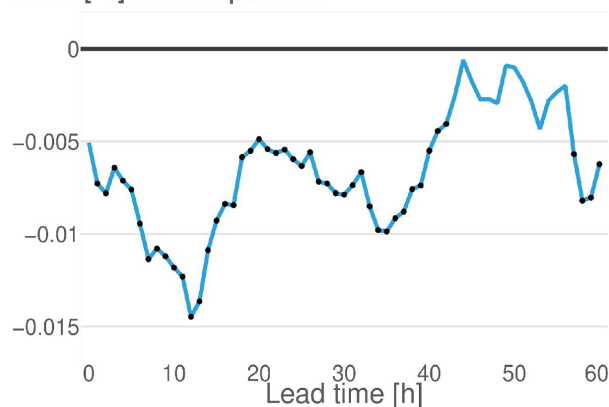

CRPS [%]. 2-m relative humidity

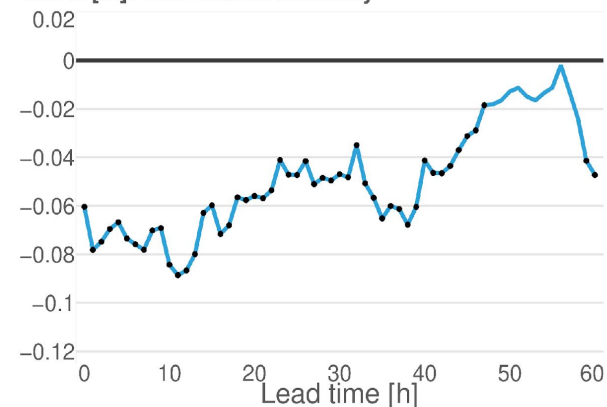


CRPS [m/s]. 10-m wind speed

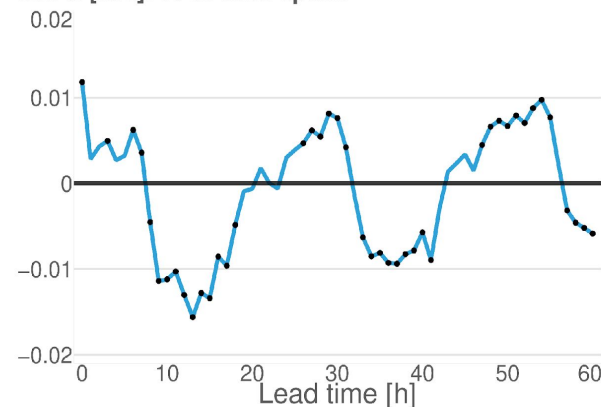


Upper-air verification – CRPS

- 925 hPa
- Similar as for surface


CRPS [°C]. 925-hPa temperature

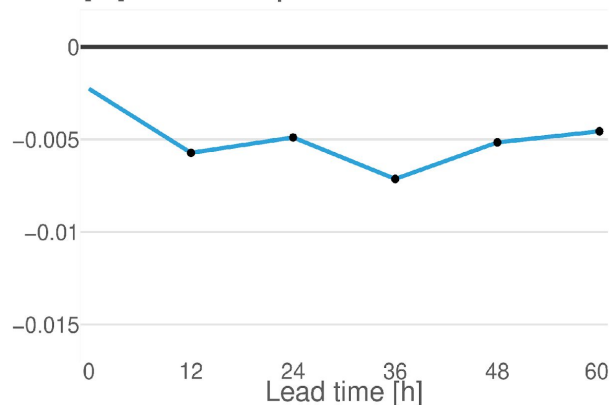

CRPS [%]. 925-hPa relative humidity

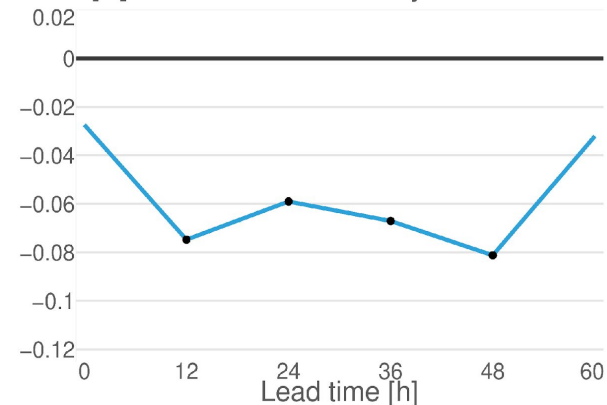


CRPS [m/s]. 925-hPa wind speed

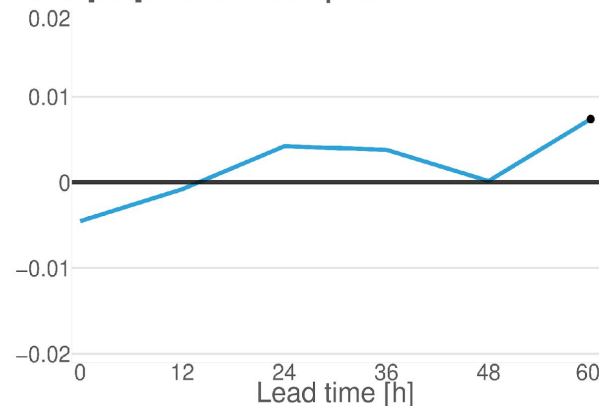


Upper-air verification – CRPS

- 850 hPa
- More neutral results but still slightly positive
- Expected as model physics plays more dominant role closer to the surface


CRPS [°C]. 850-hPa temperature

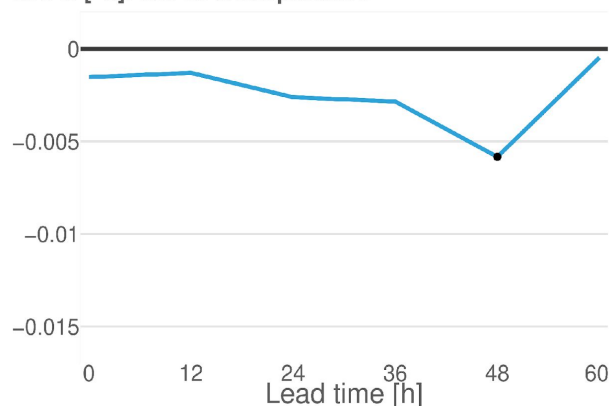

CRPS [%]. 850-hPa relative humidity

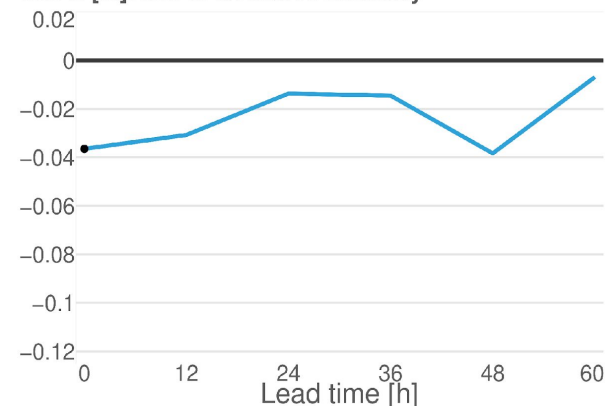

CRPS [m/s]. 850-hPa wind speed

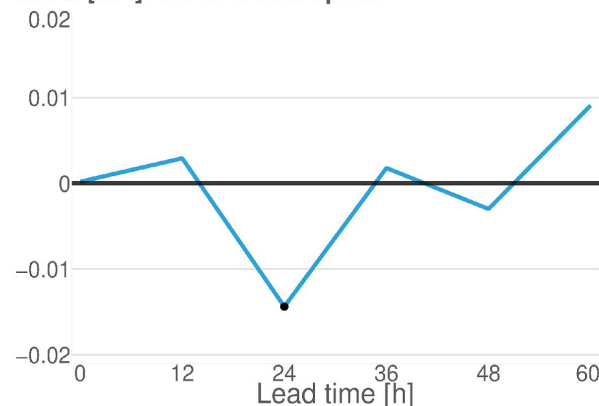


Domain averaged spread

- Go beyond station locations
 - Domain averaged spread with respect to **SPP** for February 2024
- Spread increased for all lead times




Monthly averaged spread difference

- Difference of monthly averaged spread
 - FDSPP - SPP
- Spread is consistently increased for all variables
- Example for 10-m wind speed at +12 h

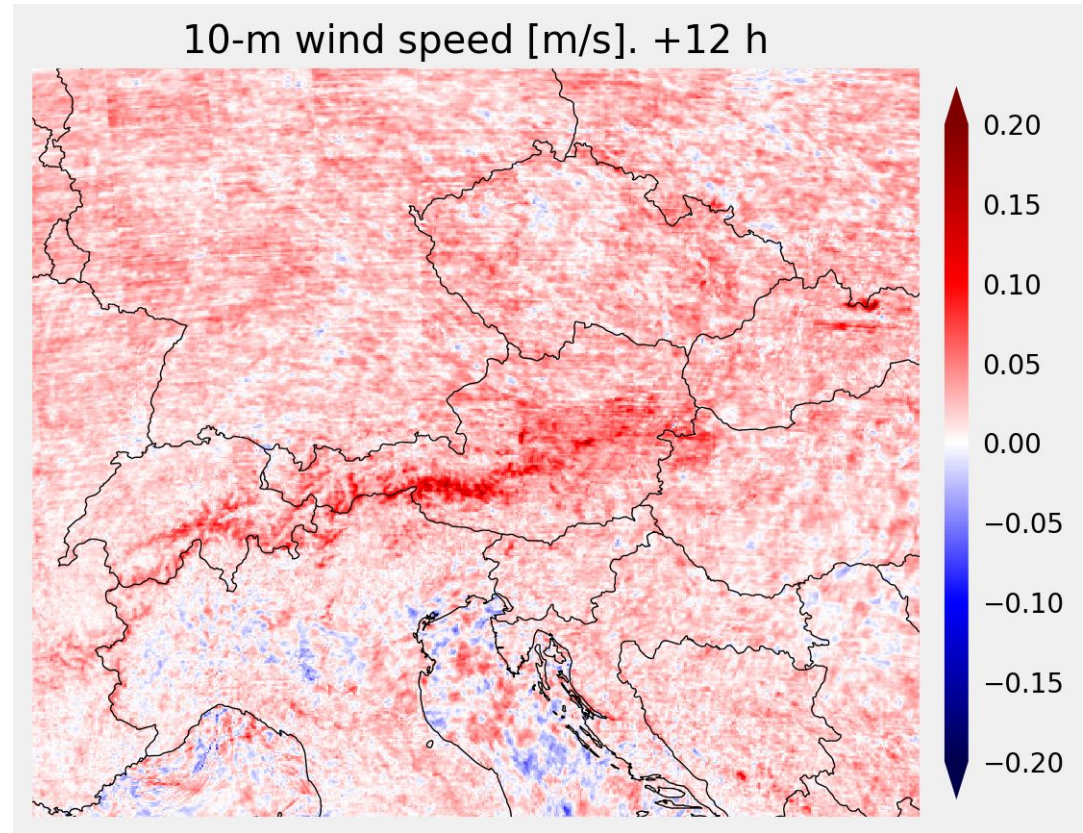


Domain averaged values

- Impact on mean values
 - We do not want to change the mean state
- Mostly unaffected

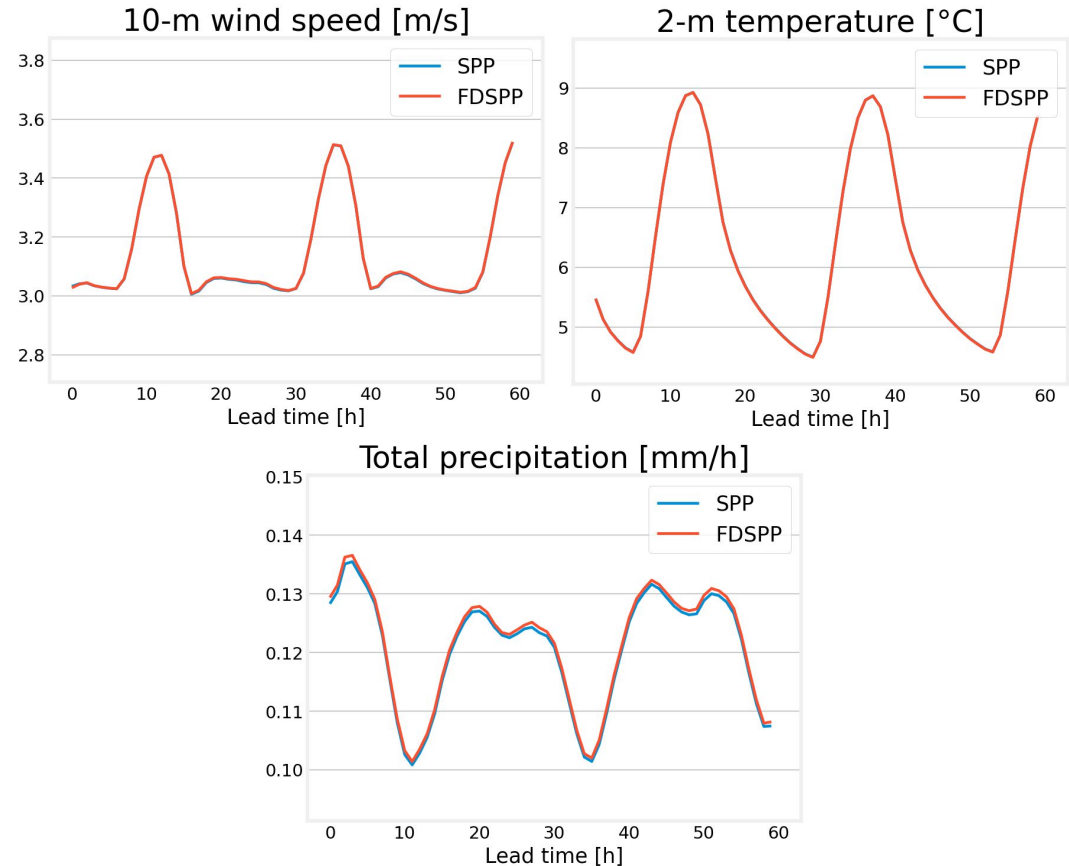

Precipitation

- Example
 - 10 February 2024
 - 18-24 h accumulation
- SPP vs FDSPP
- Very small impact on spatial distribution
- Small impact on precipitation amounts

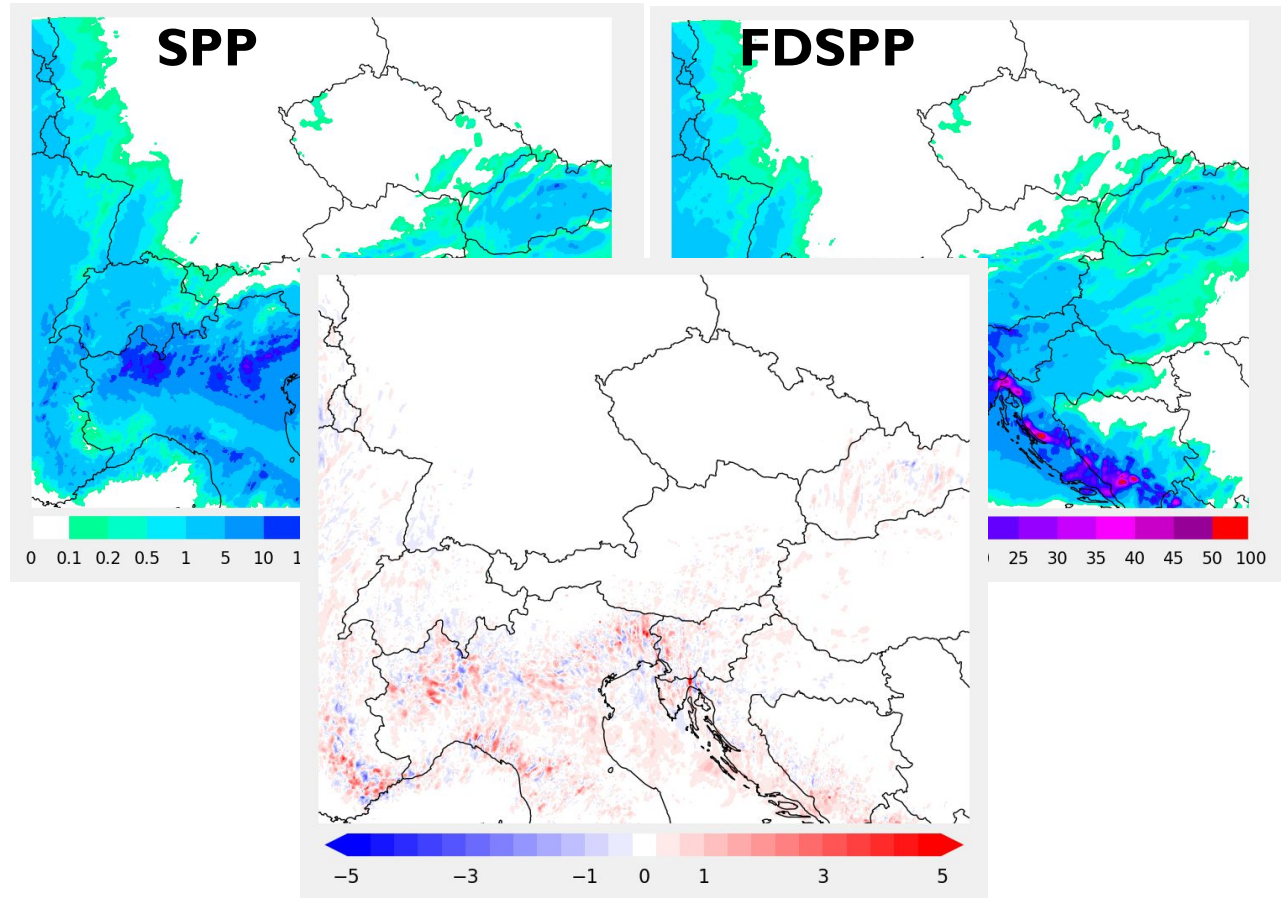

- New perturbation method – flow dependent SPP
 - *LSPP_FLOWD* namelist switch
- **FD-SPP** behaves expectedly
 - Perturbs more in targeted areas
- Spread is increased, RMSE decreased
 - RMSE/spread ratio is improved
- CRPS decreased
- To do
 - FSS for precipitation should be calculated
 - Summer period should be included